

10/524092 524, 092

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/015198 A1

(51) International Patent Classification⁷: **D21G 9/00**,
B65H 20/10 // 23/24

(21) International Application Number:
PCT/FI2003/000595

(22) International Filing Date: 7 August 2003 (07.08.2003)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20021459 9 August 2002 (09.08.2002) FI

(71) Applicant (for all designated States except US): **METSO PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130 HELSINKI (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **AHVENNIEMI, Vesa** [FI/FI]; Heinätie 13 A, FIN-00730 HELSINKI (FI). **WIDELL, Kenneth** [FI/FI]; Lönnrotinkatu 23 B 27,

FIN-00120 HELSINKI (FI). **KASULA, Hannu** [FI/FI]; Annantie 29, FIN-04220 KERAVALA (FI). **LAINNE, Seppo** [FI/FI]; Jääskentie 10, FIN-02140 ESPOO (FI). **FAGERSTRÖM, Bo** [FI/FI]; Metsätörmäkuja 4, FIN-02940 ESPOO (FI).


(74) Agent: **FORSSÉN & SALOMAA OY**; Eerikinkatu 2, FIN-00100 HELSINKI (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR THREADING A WEB IN THE REELING OF A PAPER OR BOARD WEB

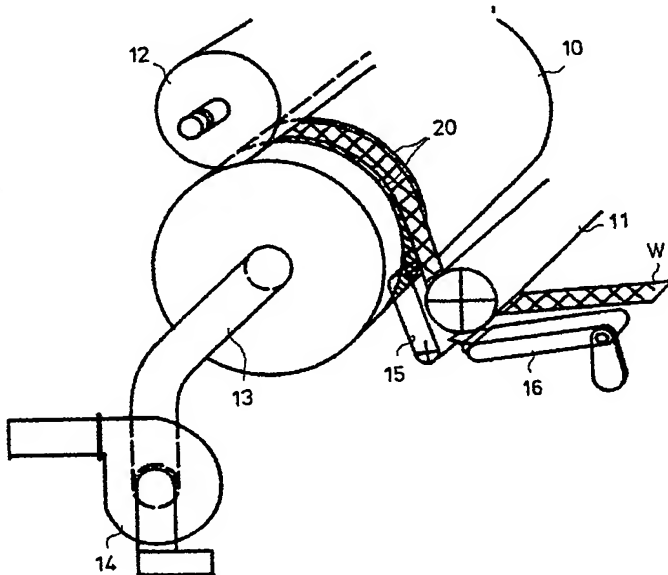

(57) Abstract: The invention relates to a method for threading a web in the reeling of a paper or board web, in which method a tail strip (W) of the web is passed into a reeling nip between a reeling drum (10) and a reel spool (12), on which reel spool (12) a web roll is formed, in which method the tail strip (W) of the web is conducted on the surface of the reeling drum (10) by means of suction arranged in the reeling drum (10). In the method, the tail strip (W) of the web is passed into the reeling nip between the reeling drum (10) and the reel spool (12) by means of a suction zone (20) which extends substantially around the entire circumference of the reeling drum and which is situated on the surface of the reeling drum (10) in an area where a full-width web runs during reeling, so that the tail strip (W) of the web can be conducted directly along the suction zone (20). The invention also relates to a device for threading a web in the reeling of a paper or board web, which device is a reeling drum (10) which is used in the reeling of a paper or board web and which is arranged to form a reeling nip with a reel spool (12), around which reel spool (12) a web roll is arranged to be

formed, which reeling drum (10) comprises suction apertures to provide a suction effect on the surface of the reeling drum (10). A suction zone (20) is formed in the reeling drum (10). The suction zone (20) extends substantially around the entire circumference of the reeling drum (10), and the suction zone (20) is placed in the longitudinal direction of the reeling drum (10), i.e. in the width direction of the web, in an area where a full-width web is arranged to run during reeling.

BEST AVAILABLE COPY

WO 2004/015198 A1



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Method and device for threading a web
in the reeling of a paper or board web

5

The invention relates to a method according to the preamble of claim 1.

10 The invention also relates to a device according to the preamble of claim 6.

As known in the prior art, in connection with the reeling of a paper web, a reeling drum is used which is provided with suction zones of the sector type, i.e. suction takes place through holes situated in a suction drum shell only in part of the circumference of the drum in the area of a certain sector. One prior-art arrangement in the reeling of a paper web, using a reeling drum provided with a suction zone sector, is disclosed in *FI patent 74446*. In known arrangements in which the suction zone is formed into a sector, it is hardly at all possible to remove the boundary layer air flow produced by the rotating drum. In addition, the suction zone sector in known applications is situated outside the web in the length direction of the drum, i.e. in the width direction of the web, and for this reason during threading it has been necessary to guide the tail strip to the side, i.e. to the zone area, by means of blowing. In many cases, the location of the suction zone sector is also not optimal on the circumference of the drum because the tail strip typically misses the area of the suction sector in the threading operation. If the tail strip misses the suction zone, the tail strip slips out of the machine to the tending side, thus not entering the nip between the reeling drum and the reel spool, i.e. a holding/pulling point. The strip may also be directed towards the middle of the machine and it may slip into the nip from some unpredictable point. This leads to a random amount of loose strip. The tightening of the loose strip lengthens the time taken by threading unnecessarily. In many cases it does not

15
20
25
30

even succeed, but breaks when it flaps and flutters (English: flap and flutter) into other structures of the machine. After unsuccessful threading attempts, the threading path must be cleared to remove broken tail strips in order that new attempts may be made, which in turn further increases the threading time unnecessarily. The arrangement known from FI patent 74446 is primarily intended to aid reeling in order that the reeling speed might be increased, when needed. This known arrangement does not teach threading of a web.

In the arrangements known from the prior art, the holes through which a suction effect is arranged to be produced, are generally placed in the ridges between the grooves of grooved drums.

With respect to the state of the art relating to the threading of a paper web in connection with finishing devices, reference may be made, for example, to *FI patent 98742*, which discloses a method and an apparatus for threading a paper web on a surface treatment line for paper. In this known arrangement, the paper guide rolls and the surface treatment roll of the surface treatment line are provided with a suction sector and a blow sector, and by using them it is possible to cause the tail strip to adhere reliably to the perforated surface of the roll by means of the suction sector, and by means of suction it is possible to assure the right direction of the draw of the tail strip as well as the guidability of the draw, and formation of an air film between the paper web and the roll is avoided by means of the blow sector, and the tail strip is separated from the roll surface by means of blowing.

An object of the invention is to create a method and a device for threading a web in connection with the reeling of a paper or board web, in which method and device the drawbacks of the known arrangements described above are eliminated or at least minimized.

A particular object of the invention is to create an arrangement which, when used, enables the tail strip to adhere very well to the reeling drum and ensures that the tail strip is guided to the reeling nip.

- 5 A further object of the invention is to provide an arrangement which enables the tail strip to be positioned in the suction zone of the reeling drum both in the circumferential direction and in the lateral direction.

10 With a view to achieving the objects described above as well as those coming out later, the method according to the invention is mainly characterized in what is set forth in the characterizing part of claim 1.

The device according to the invention is in turn mainly characterized in what is set forth in the characterizing part of claim 6.

15

In accordance with the invention, a suction zone is arranged in connection with a reeling drum, which suction zone extends over the entire circumference of the drum and is located in the area of the web in the width direction of the web, i.e. in the longitudinal direction of the drum, so that the tail strip of the web will also be
20 positioned in the suction zone area also in the lateral direction without a transfer accomplished by means of blowings or the like. The strip is sought to be brought to the holding point as tight as possible (= without looseness).

In accordance with an advantageous feature of the arrangement of the invention,
25 the apertures for achieving a suction effect, i.e. suction holes, are arranged at the bottom of the grooves of a grooved drum, most appropriately with close spacing. By this means, the boundary layers produced by the rotating drum and the moving web can be eliminated or reduced so as to be insignificant, with the result that the threading operation takes place reliably.

30

In an arrangement in accordance with an advantageous embodiment of the invention, the boundary layer produced during one revolution of the reeling drum is removed during the same revolution and, at the same time, the air amount carried with the tail strip is sucked. In that connection, the air amount sucked
5 through the suction zone preferably exceeds the air amount carried in the boundary layer of the drum, so that by means of this so-called oversucking of the boundary layer it is assured that a vacuum effect, i.e. a lower static pressure, extends beyond the boundary layer, whereby the tail strip can be brought closer to the drum and caused to adhere to the surface of the reeling drum. The air carried
10 with the tail strip is also sucked by means of this so-called oversucking.

In the arrangement in accordance with the invention, the tail strip can be made to adhere to the reeling drum in a reliable manner and the tail strip goes into the nip in a reliable manner. When, in accordance with the invention, the suction zone is
15 disposed within the web area in the width direction of the web, the tail strip can be brought to the suction zone of the reeling drum without a lateral shift, which means that no separate means are needed for moving the tail strip in the lateral direction. In addition, in the arrangement in accordance with the invention, the tail strip is always positioned in the suction zone in the circumferential direction
20 because the suction zone extends over the entire circumference.

In accordance with an advantageous embodiment of the invention, suction holes are arranged at the bottom of the grooves, so-called venta grooves, provided in the drum, so that the paper adheres to the surface of the drum because in entering the
25 nip there is no discontinuity in the pressure prevailing in the groove. By so placing the holes at the bottom of the groove, the force holding the web against the drum surface can be made greater because the area of the groove against the web is larger than that of a single hole. After the web has adhered to the surface of the drum, the pressure in the groove is roughly of the same order as in the case
30 where the web would cover one hole.

In accordance with advantageous additional features of the invention, the width of the suction zone in the longitudinal direction of the drum, i.e. in the width direction of the web, is smaller than the width of the web, advantageously 2-4 times the width of the tail strip, the distance between the suction holes in the circumferential direction of the reeling drum is about 10-100 mm, preferably 15-25 mm, and the diameter of the suction apertures is 1-10 mm, advantageously 2-4 mm, the grooves of the reeling drum are, for example, 1-3 mm wide, typically 1.5-2.5 mm wide, and the depth of the grooves is 1-8 mm, typically 3.5-4.5 mm, and the distance between the grooves is 5-100 mm, typically 6-25 mm. The speed of air in the holes of the suction zone is 20-200 m/s, advantageously 50-100 m/s, and the air sucked through the suction zone is conducted out from a hole situated in the axle of the reeling drum or in another appropriate manner. The air is passed from the end of the axle along a tube to a blower or, alternatively, the air can be drawn from the end of the drum through the flange of the drum by means of a separate suction box, from which it is passed to a blower. Generally, the suction zone is at either edge of the paper machine in the area of a roll end, but it can also be situated on an arbitrary line between the edges of the machine.

In the following, the invention will be described in greater detail with reference to the figures in the appended drawing, but the invention is not by any means meant to be narrowly limited to the details of these figures.

Figure 1 schematically shows a tail strip threading situation on a reel-up in accordance with one advantageous exemplifying embodiment of the invention.

25

Figure 2A is a schematic view of a reeling drum used in accordance with one exemplifying embodiment of the invention.

Figure 2B schematically shows a partial enlargement of the area A in Fig. 2A.

30

Figure 2C is a schematic partial cross-sectional view of a nip between a reeling drum and a reel spool.

Figure 3 schematically shows a boundary layer in a reel-up.

5

Figure 4 schematically shows a measurement result relating to boundary layers of a reeling drum.

10 In the schematic view of the embodiment shown in Fig. 1, a tail strip W is passed in a threading situation in a reel-up via a paper guide roll 11 or equivalent to a reeling drum 10, on which it adheres to the surface of the reeling drum 10 by means of a suction zone 20 of the reeling drum 10 and by means of the suction zone 20 the web is passed to a reeling nip between the reeling drum 10 and a reel spool 12, from which nip the tail strip is turned onto the reel spool 12 to start a new reeling operation. Belt conveyors 15, 16, the operation of which is in itself known by a person skilled in the art, are arranged in the vicinity of the paper guide roll 11 for conducting the tail strip W. A suction tube 13 leads from one end of the reeling drum 10 to a blower 14 to produce a suction zone in the suction zone 20 by means of suction provided from inside the reeling drum. The suction zone 20 is placed in the reeling drum 10 in the longitudinal direction of the reeling drum 10, i.e. in the width direction of the web, in the area where a full-width web runs in the normal running situation (not shown).

25 As shown in Fig. 2A, the reeling drum 10 comprises ends 17, 18, and a reeling drum shell (not shown), with space remaining inside it, is disposed around an axle between the ends 17, 18. The suction zone 20 of the reeling drum 10 is placed in the vicinity of one end 17 of the reeling drum at a distance from the end 17 but in that area where the full-width web runs. The other end of the reeling drum 10 is denoted with the reference numeral 18.

30

In the schematic partial view of Fig. 2A shown in Fig. 2B, the area A shows that the suction zone 20 comprises grooves 21, i.e. so-called venta grooves, and suction holes 22 through which a suction effect is provided for the suction zone area on the surface of the reeling drum 10. As shown in Fig. 2B, the suction holes 22 are placed at the venta grooves 21.

It is seen in the schematic partial view of Fig. 2C from the area of the suction zone 20 of the reeling drum 10, when the reeling drum 10 forms a nip with the reel spool 12, that the grooves 21 extend to a certain depth from the surface of the reeling drum 10 and the suction apertures, or the suction holes 22, are placed at the grooves 21, which suction holes extend through the shell of the reeling drum 10 to the inside of the shell of the reeling drum 10 to transmit a suction effect to the surface of the reeling drum 10.

Fig. 3A, without boundary layer suction, and Fig. 3B, with boundary layer suction, schematically show in a reel-up a boundary layer L which is formed in the reel-up in the area of the reeling drum 10 and the reel spool 12, which boundary layer is controlled in a threading situation by means of a suction zone in accordance with the invention such that the amount of air sucked through the suction zone exceeds the amount of air carried in the boundary layer L of the drum, thereby assuring a suction effect, i.e. a lower static pressure on the surface of the drum and in its vicinity, so that the tail strip can be brought closer to the drum and caused to adhere to the surface of the drum. The air carried with the tail strip is also sucked by means of the suction effect. In Figs. 3A and 3B, a web guide roll is denoted with the reference numeral 19.

Fig. 4 shows some schematic measurement results relating to a boundary layer produced on a reeling drum in a trial situation in which the speed was 1500 m/min and when a pressure difference was effective over the reeling drum shell and when there was no pressure difference over the reeling drum shell. The curve 31 represents a situation when the pressure difference was 0 and the curve 32

represents a situation when the pressure difference was 270 Pa. The X axis represents the distance from the drum surface and the Y axis represents the speed of air in units m/s.

- 5 Above, the invention has been described only with reference to some of its advantageous exemplifying embodiments, to the details of which the invention is, however, not meant to be narrowly limited.

Claims

1. A method for threading a web in the reeling of a paper or board web, in which method a tail strip (W) of the web is passed into a reeling nip between a reeling drum (10) and a reel spool (12), on which reel spool (12) a web roll is formed, in which method the tail strip (W) of the web is conducted on the surface of the reeling drum (10) by means of suction arranged in the reeling drum (10), **characterized** in that, in the method, the tail strip (W) of the web is passed into the reeling nip between the reeling drum (10) and the reel spool (12) by means of a suction zone (20) which extends substantially around the entire circumference of the reeling drum and which is situated on the surface of the reeling drum (10) in an area where a full-width web runs during reeling, so that the tail strip (W) of the web can be conducted directly along the suction zone (20).
2. A method as claimed in claim 1, **characterized** in that, in the method, the suction effect of the suction zone (20) is provided through suction apertures (22) arranged in connection with grooves (21) arranged in the surface of the reeling drum (10).
3. A method as claimed in claim 1 or 2, **characterized** in that, in the method, a boundary layer (L) produced by the rotating reeling drum (20) and the moving tail strip (W) of the web is removed by means of a suction effect which is provided through the suction zone (20) and which is arranged to extend beyond the boundary layer (L).
4. A method as claimed in claim 3, **characterized** in that the air carried with the tail strip (W) is also sucked by means of said suction effect.
5. A method as claimed in any one of claims 1 to 4, **characterized** in that, in the method, the tail strip of the web (W) is conducted to the reeling nip by means of a

suction zone (20), which suction zone (20) is situated in the vicinity of one end of the reeling drum (10).

6. A device for threading a web in the reeling of a paper or board web, which device is a reeling drum (10) which is used in the reeling of a paper or board web and which is arranged to form a reeling nip with a reel spool (12), around which reel spool (12) a web roll is arranged to be formed, which reeling drum (10) comprises suction apertures to provide a suction effect on the surface of the reeling drum (10), **characterized** in that a suction zone (20) is formed in the reeling drum (10), that the suction zone (20) extends substantially around the entire circumference of the reeling drum (10), and that the suction zone (20) is placed in the longitudinal direction of the reeling drum (10), i.e. in the width direction of the web, in an area where a full-width web is arranged to run during reeling.

15

7. A device as claimed in claim 6, **characterized** in that the reeling drum (10) comprises grooves (21) and that suction apertures (22) of the suction zone are situated at said grooves (21) in said grooves.

8. A device as claimed in claim 6 or 7, **characterized** in that the suction effect, i.e. a lower static pressure, produced in the suction zone (20) is arranged to extend beyond a boundary layer (L) which is produced because of the rotation of the reeling drum and/or due to the effect of air carried with the tail strip (W).

9. A device as claimed in any one of claims 6 to 8, **characterized** in that the suction apertures (22) of the suction zone (20) are arranged with close spacing of the holes.

10. A device as claimed in any one of claims 6 to 9, **characterized** in that the distance between the suction apertures of the suction zone (20) in the

30

circumferential direction of the reeling drum (10) is 10-100 mm and the diameter of the suction holes is 1-10 mm.

11. A device as claimed in any one of claims 6 to 10, **characterized** in that the
5 width of the suction zone (20) is smaller than the width of the web.

12. A device as claimed in any one of claims 6 to 11, **characterized** in that the width of the suction zone (20) is 2 to 4 the width of the tail strip.

10 13. A device as claimed in any one of claims 6 to 12, **characterized** in that the suction zone (20) is formed in the vicinity of one end of the reeling drum (10).

14. A device as claimed in any one of claims 6 to 13, **characterized** in that the suction effect of the suction zone (20) is arranged to be provided through a hole
15 situated in the axle of the reeling drum (10), from which hole air is arranged to be transported to a blower (14) along a tube (13) or equivalent.

15. A device as claimed in any one of claims 6 to 13, **characterized** in that the suction effect of the suction zone is arranged to be provided through the end of the
20 reeling drum (10) by means of a separate suction box.

1/4

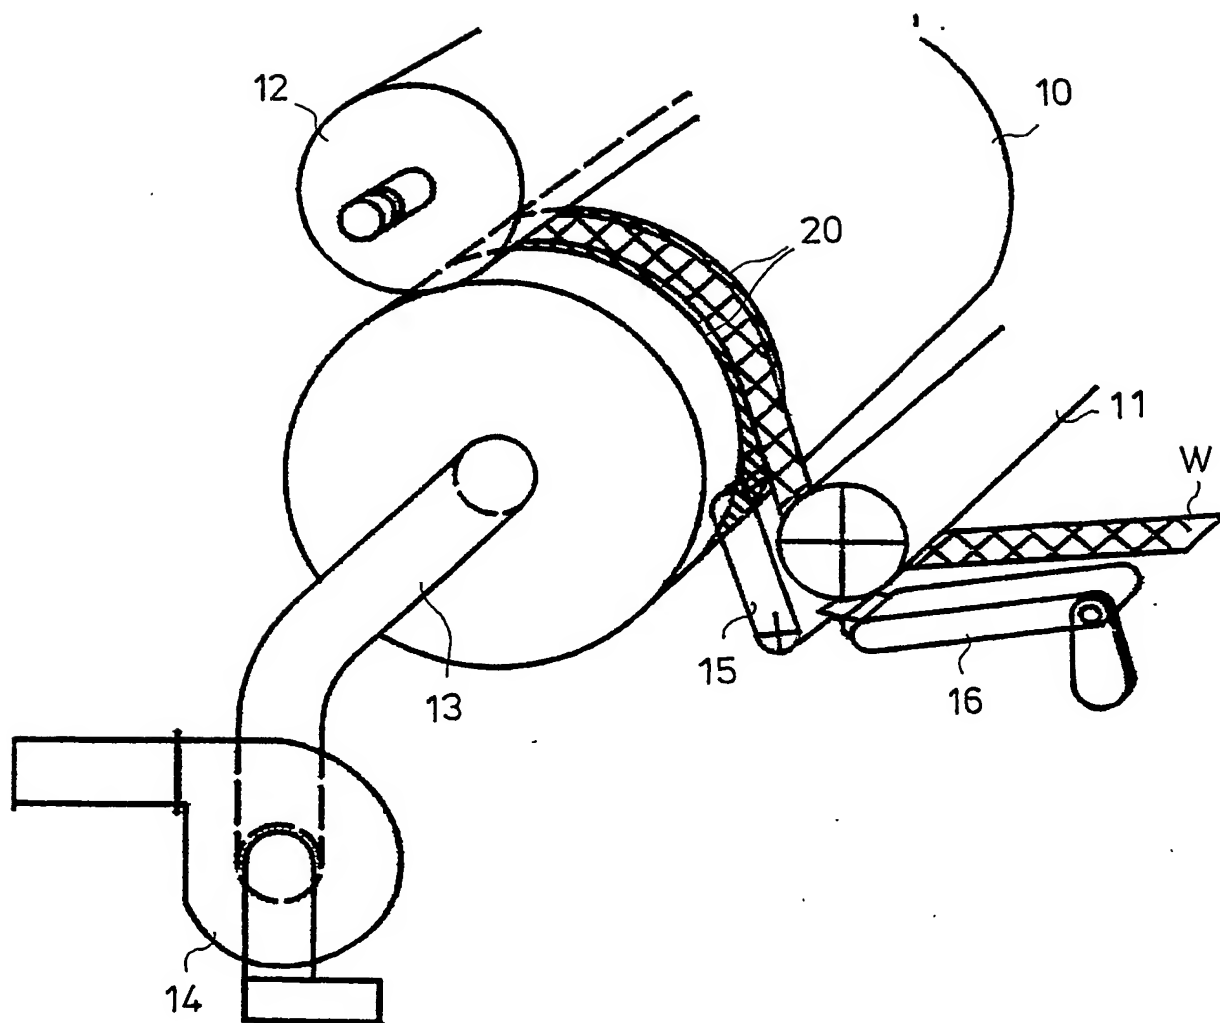


FIG. 1

2/4

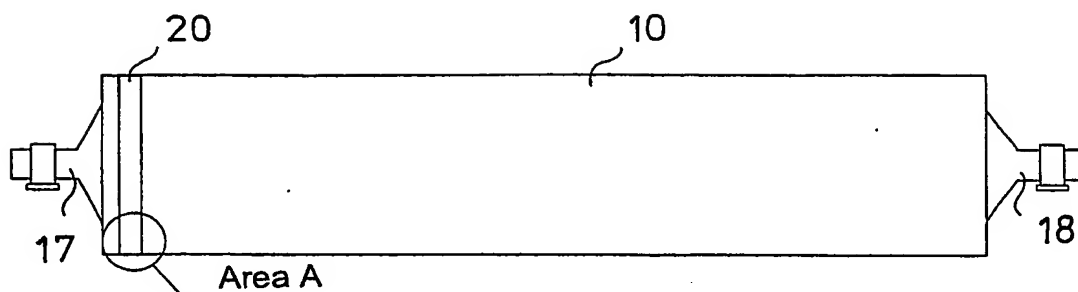


FIG. 2A

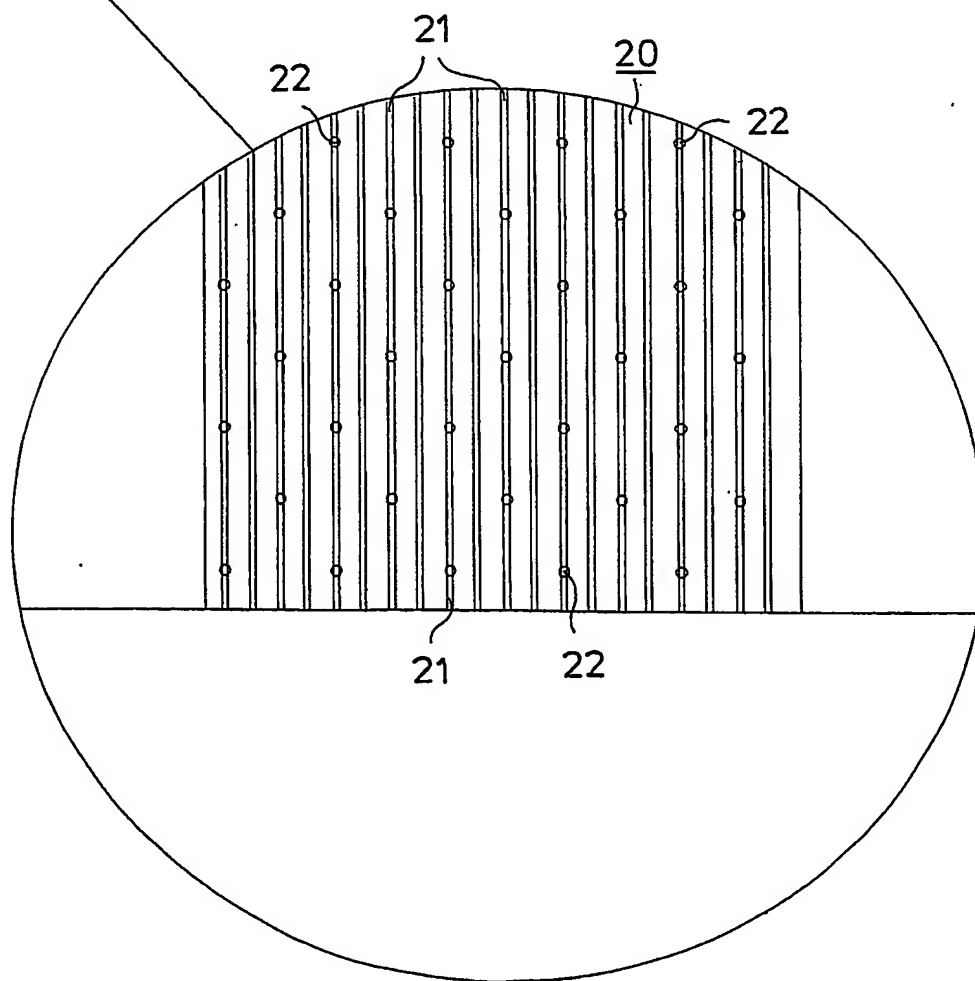


FIG. 2B

3/4

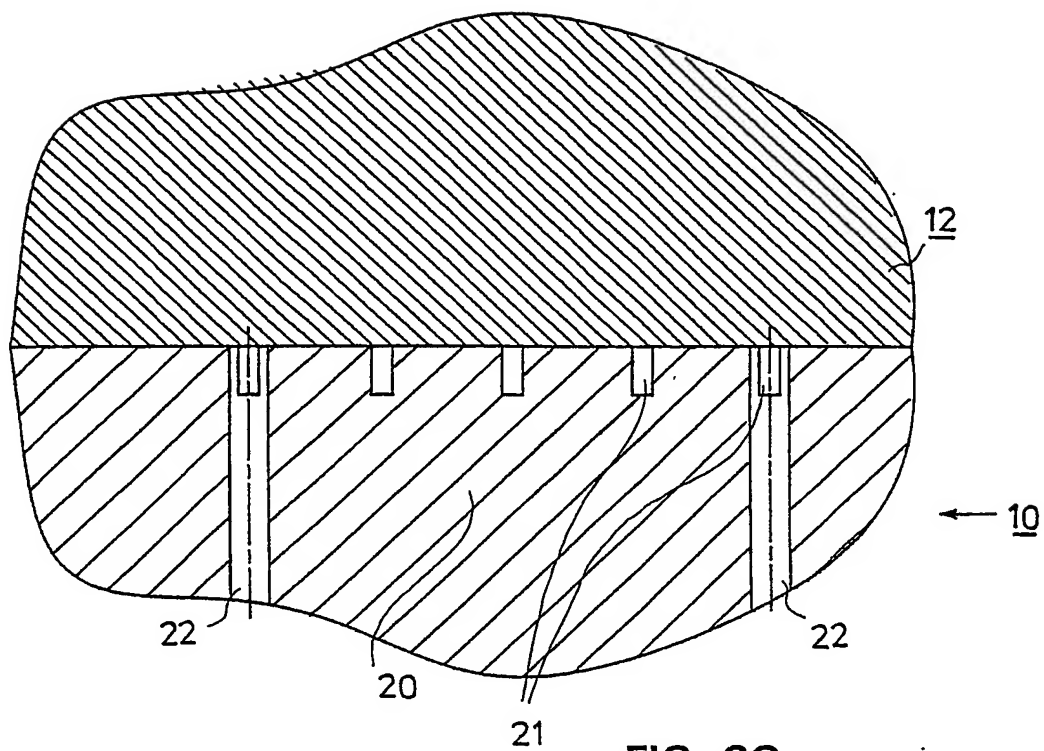


FIG. 2C

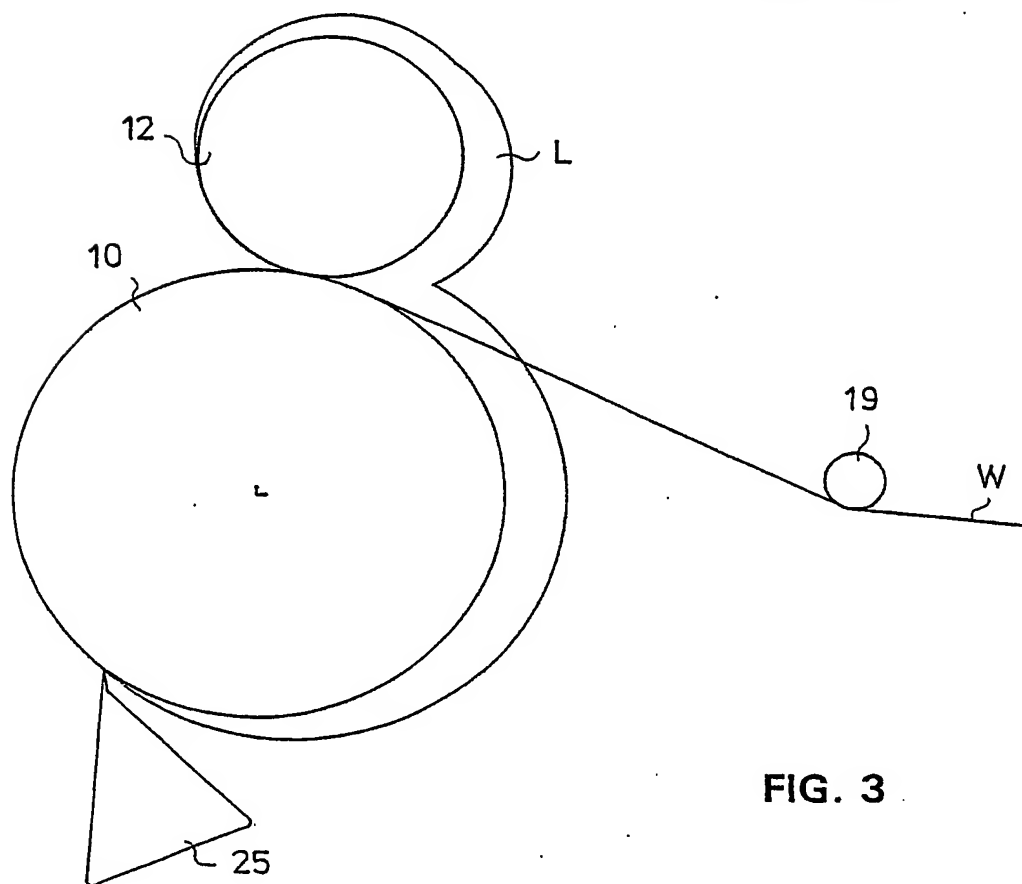


FIG. 3

Boundary Layer of Reeling Drum at 1500 m/min (25 m/s) with and without
Pressure Difference over the Drum Shell

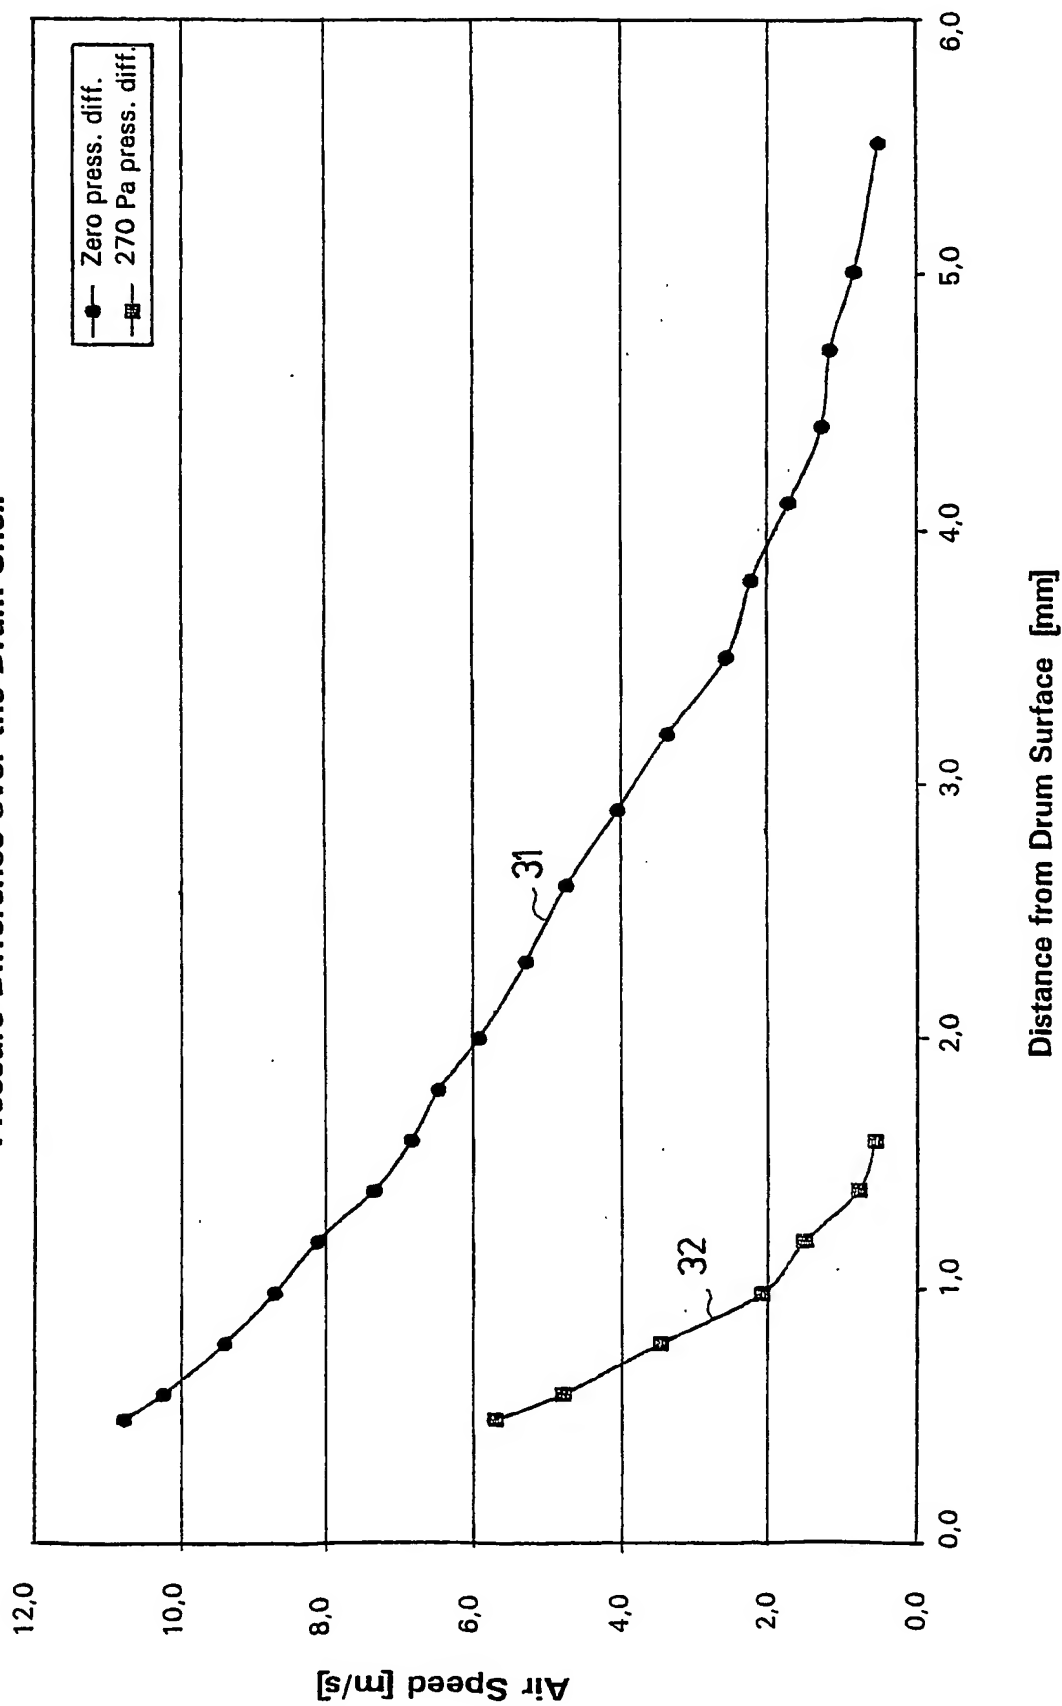


FIG. 4

INTERNATIONAL SEARCH REPORT

Intern Application No
PCT/FI/00595

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 D21G9/00 B65H20/10 //B65H23/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D21G B65H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 199 46 379 A (VOITH PAPER PATENT GMBH) 29 March 2001 (2001-03-29) column 1, line 37 -column 2, line 40 column 6, line 45 -column 7, line 23 ---	1,2,5-7, 9-15
A	US 5 873 180 A (GRUNDER THOMAS K) 23 February 1999 (1999-02-23) the whole document ---	1-15
A	US 6 413 374 B1 (KOIVUKUNNAS PEKKA ET AL) 2 July 2002 (2002-07-02) the whole document ---	1-15
A	WO 99 20834 A (AUTIO JUKKA ; VALMET CORP (FI)) 29 April 1999 (1999-04-29) the whole document ---	1-15
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

1 December 2003

Date of mailing of the international search report

9 8. 12. 03

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

TEIJA RASCH/JAA

INTERNATIONAL SEARCH REPORT

Internat'l Application No
PCT/FI/00595

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 648 942 A (HAUSER LUDWIG ET AL) 10 March 1987 (1987-03-10) the whole document ---	1-15
A	US 5 915 648 A (MADRZAK ZYGMUNT ET AL) 29 June 1999 (1999-06-29) the whole document -----	6-15

INTERNATIONAL SEARCH REPORT

.....Jrma patent family members

Interr Application No
PCT/1 3/00595

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19946379	A	29-03-2001	DE 19946379 A1	29-03-2001
US 5873180	A	23-02-1999	CA 2216048 A1	25-03-1998
			JP 2926557 B2	28-07-1999
			JP 10110397 A	28-04-1998
US 6413374	B1	02-07-2002	FI 974231 A	15-05-1999
			FI 103425 B1	30-06-1999
			AT 410684 B	25-06-2003
			AT 912498 A	15-11-2002
			AU 1236799 A	07-06-1999
			CA 2309657 A1	27-05-1999
			DE 19882962 T0	15-02-2001
			WO 9925920 A1	27-05-1999
WO 9920834	A	29-04-1999	FI 973986 A	18-04-1999
			AU 9542998 A	10-05-1999
			CA 2306750 A1	29-04-1999
			DE 19882752 T0	21-09-2000
			WO 9920834 A1	29-04-1999
US 4648942	A	10-03-1987	DE 3328162 A1	21-02-1985
			AT 384050 B	25-09-1987
			AT 901484 A	15-02-1987
			DE 3490288 D2	03-10-1985
			WO 8500841 A1	28-02-1985
			FI 851361 A ,B,	03-04-1985
			JP 61500073 T	16-01-1986
			SE 459012 B	29-05-1989
			SE 8501660 A	03-04-1985
US 5915648	A	29-06-1999	DE 19647919 A1	28-05-1998
			DE 19822052 A1	18-11-1999
			DE 59709349 D1	27-03-2003
			EP 0860545 A2	26-08-1998

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.